



Verschraubung Innengewinde-Anschweissende

mit zylindrischem Whitworth-Rohrgewinde nach DIN EN 10226

konisch dichtend

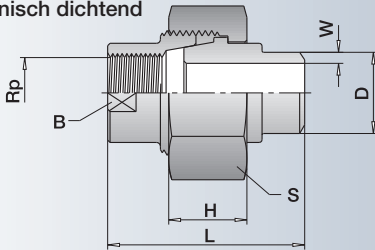

flach dichtend



SF
GF-145
Rp

Verschraubung konisch dichtend

PN	DN	Rp	D x W	S	B	L	H	GF-No.	€
50	6	1/8"	10,2 x 2,00	27	14	35,5	15	GF-145CR18-7	
	8	1/4"	13,5 x 2,35	27	17	36,5	16	GF-145CR14-7	
	10	3/8"	17,2 x 2,35	32	20	40,5	16	GF-145CR38-7	
	15	1/2"	21,3 x 2,65	41	24	47,5	18	GF-145CR12-7	
	20	3/4"	26,9 x 2,65	50	32	53,0	20	GF-145CR34-7	
40	25	1"	33,7 x 3,25	55	38	59,0	22	GF-145CR1-7	
	32	1 1/4"	42,4 x 3,25	70	48	64,5	24	GF-145CR114-7	
	40	1 1/2"	48,5 x 3,25	75	55	69,0	25	GF-145CR112-7	
	50	2"	60,3 x 3,65	90	67	72,5	27	GF-145CR2-7	
	65	2 1/2"	76,1 x 3,65	110	85	80,5	30	GF-145CR212-7	
25	80	3"	88,9 x 4,05	130	100	86,5	31	GF-145CR3-7	
	100	4"	114,5 x 4,50	155	120	96,5	34	GF-145CR4-7	

■ Werkstoff: 1.4571

Verschraubung flach dichtend

PN	DN	Rp	D x W	S	B	L	H	GF-No.	€
25	6	1/8"	10,2 x 2,00	27	14	35,5	15	GF-145FR18-7	
	8	1/4"	13,5 x 2,35	27	17	36,5	16	GF-145FR14-7	
	10	3/8"	17,2 x 2,35	32	20	40,5	16	GF-145FR38-7	
	15	1/2"	21,3 x 2,65	41	24	47,5	18	GF-145FR12-7	
	20	3/4"	26,9 x 2,65	50	32	53,0	20	GF-145FR34-7	
16	25	1"	33,7 x 3,25	55	38	59,0	22	GF-145FR1-7	
	32	1 1/4"	42,4 x 3,25	70	48	64,5	24	GF-145FR114-7	
	40	1 1/2"	48,5 x 3,25	75	55	69,0	25	GF-145FR112-7	
	50	2"	60,3 x 3,65	90	67	72,5	27	GF-145FR2-7	
	65	2 1/2"	76,1 x 3,65	110	85	80,5	30	GF-145FR212-7	
10	80	3"	88,9 x 4,05	130	100	86,5	31	GF-145FR3-7	
	100	4"	114,5 x 4,50	155	120	96,5	34	GF-145FR4-7	

■ Werkstoff: 1.4571

Flachdichtung aus PTFE
bei Temperaturen über 100°C Dichtungswerkstoff anfragen!


1) = NPT mit anderen Maßen

Verschraubung

Innengewinde-Anschweissende

mit zylindrischem Whitworth-Rohrgewinde nach DIN EN 10226

SF
GF-
145
Rp



Verschraubung konisch dichtend

PN	DN	Rp	D	S	B	L	H	GF-No.	R/Rp	€ NPT(1)
50	8	1/4"	13,5	21	13	33	17	GF-145C14-4L		
	10	3/8"	17,2	27	15	35	23	GF-145C38-4L		
	15	1/2"	21,3	32	16	39	27	GF-145C12-4L		
	20	3/4"	26,9	38	17,5	43	36	GF-145C34-4L		
	25	1"	33,7	48	18,5	48	42	GF-145C1-4L		
40	32	1 1/4"	42,4	55	20	50	52	GF-145C114-4L		
	40	1 1/2"	48,3	63	21	54	60	GF-145C112-4L		
	50	2"	60,3	75	26	60	70	GF-145C2-4L		

■ Werkstoff: 4L = AISI 316L

Verschraubung flach dichtend

PN	DN	Rp	D	S	B	L	H	GF-No.	R/Rp	€ NPT(1)
25	8	1/4"	13,5	21	13	33	17	GF-145F14-4L		
	10	3/8"	17,2	27	15	35	23	GF-145F38-4L		
	15	1/2"	21,3	32	16	39	27	GF-145F12-4L		
	20	3/4"	26,9	38	32	53,0	20	GF-145FR34-4L		
	25	1"	33,7	55	38	59,0	22	GF-145FR1-4L		
16	32	1 1/4"	42,4	70	48	64,5	24	GF-145FR114-4L		
	40	1 1/2"	48,5	75	55	69,0	25	GF-145FR112-4L		
	50	2"	60,3	90	67	72,5	27	GF-145FR2-4L		

■ Werkstoff: 4L = AISI 316L

Flachdichtung aus PTFE

bei Temperaturen über 100°C Dichtungswerkstoff anfragen!

1) = NPT mit anderen Maßen
Änderungen vorbehalten.