



Verschraubung, beidseitig Außengewinde

mit kegeligem Whitworth-Rohrgewinde nach DIN EN 10226

konisch dichtend

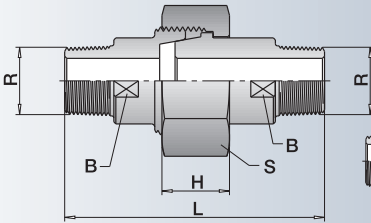

flach dichtend



SF
GF-
149
R

Verschraubung konisch dichtend

PN	DN	R	S	B	L	H	GF-No.	€
50	6	1/8"	27	12	45	15	GF-149CR18-7	
	8	1/4"	27	14	57	16	GF-149CR14-7	
	10	3/8"	32	19	62	16	GF-149CR38-7	
	15	1/2"	41	24	71	18	GF-149CR12-7	
	20	3/4"	50	30	80	20	GF-149CR34-7	
40	25	1"	55	36	90	22	GF-149CR1-7	
	32	1 1/4"	70	46	105	24	GF-149CR114-7	
	40	1 1/2"	75	53	112	25	GF-149CR112-7	
	50	2"	90	65	120	27	GF-149CR2-7	

■ Werkstoff: 1.4571

Verschraubung flach dichtend

PN	DN	R	S	B	L	H	GF-No.	€
25	6	1/8"	27	12	45	15	GF-149FR18-7	
	8	1/4"	27	14	57	16	GF-149FR14-7	
	10	3/8"	32	19	62	16	GF-149FR38-7	
	15	1/2"	41	24	71	18	GF-149FR12-7	
	20	3/4"	50	30	80	20	GF-149FR34-7	
16	25	1"	55	36	90	22	GF-149FR1-7	
	32	1 1/4"	70	46	105	24	GF-149FR114-7	
	40	1 1/2"	75	53	112	25	GF-149FR112-7	
	50	2"	90	65	120	27	GF-149FR2-7	

■ Werkstoff: 1.4571

Flachdichtung aus PTFE
bei Temperaturen über 100°C Dichtungswerkstoff anfragen!